

# GCI-C0835P

## Indoor Motorized Dome IP-Camera 12x Zoom ICR WDR



- Full D1, Colour/B&W speed Dome Camera (720x576)
- 12x motorized optical zoom with 12x digital zoom
- WDR function, Colour/B&W function with removable IR cut filter
- Vandal Resistant Dome (IK10)
- H.264 Main Profile compression mode (dual codec, 25 fps max)
- ONVIF protocol support
- SD/SDHC memory card slot for alarm and schedule image recording
- High Speed Pan/Tilt (400°/sec), minimum speed (1°/sec)
- Bidirectional Audio Support

### SUMMARY

---

#### Network Cameras

Intelligent, robust and stylish

IP technology greatly increases the effectiveness of video surveillance systems. Grundig has embraced this new technology and incorporated it into an extensive CCTV IP surveillance camera range. The new camera range includes PTZ and anti-vandal domes, for internal and external applications, with traditional box and specialist, compact casing designs also available. Each Grundig IP camera has impressive functionality, meeting every current surveillance requirement.


## SPECIFICATIONS

Image Sensor	1/4" CCD (Sony ExView HAD)
Digital Signal Processor (DSP)	Sony EFFIO DSP solution
Col/B&W	On/Off/Auto, IR-cut filter removable (ICR)
Pixels - Total	976x582 (570k)
Sensitivity	0.1 lux (Colour) / 0.01 lux (B&W)
Zoom Ratio	x 12
Focal Length	3.8 ~ 45.6 mm
Viewing Angle	5° ~ 55.4°
Aperture Ratio	F1.6(Wide)~ F2.7(Tele)
Lens Drive Type	Auto Iris
S/N Ratio	>50 dB
Resolution	650 (H) lines
BLC	On/Off + WDR
White Balance	Auto / Manual
Shutter Speed	1 sec to 1/10,000 sec
Digital Image Stabilization (DIS)	Off/On
Camera ID	20 character
Number of Privacy Zones	16
Pan Speed	Manual: 1°/s ~ 80°/s, Preset: 400°/s (max.)
Tilt Speed	Manual: 1°/s ~ 80°/s, Preset: 400°/s (max.)
Range Panning	360° endless
Range Tilting	-10° ~ 190°
Number of Preset	256
Number of Pattern	8
Digital Zoom	Off/1 ~ 12x
OSD	Yes
Video Outputs	1Vpp, BNC
Alarm Inputs	4
Alarm Outputs	1
Web Browser	MS Internet Explorer 6.0 (or higher)
Video Compression	Dual stream: H.264+H.264, H.264+MJPEG
Video Resolution	D1 (720x576), CIF (352x288)
Network Protocol	IPv4, IPv6, TCP/IP, UDP, RTP, RTSP, HTTP, HTTPS, ICMP, FTP, SMTP, DHCP, PPPoE, UPnP, IGMP, 802.1X and SNMP
SD memory	Micro SD/SDHC
Alarm Event	Alarm Input, Motion Detection or Schedule: Image transfer or alarm message by FTP, Image transfer or alarm message by E-mail, recording on SD-card and enable alarm output
Audio Compression	G.726 ADPCM, G.711
Firmware Upgrade	Firmware upgrade by Web Browser
Regulation	CE, FCC, RoHS Compliant
Operating Temperature	0°C ~ +40°C
Supply Voltage	24 VAC / PoE (IEEE 802.3af)

## SPECIFICATIONS

Power Consumption	18 W
Weight	1.2 kg
Dimensions w*h*d	Ø 131 X 200 mm

## DIMENSIONS

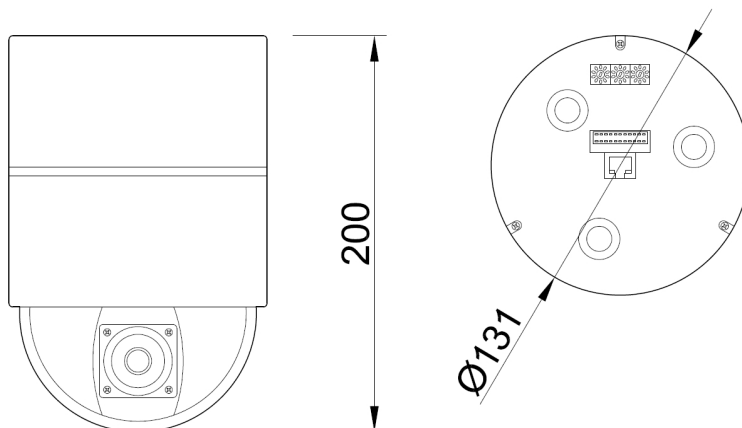

## ACCESSORIES



GBR-IC01  
Ceiling Flush Mount Adapter



GBR-AM01  
Hanging mount adapter



GBR-WA02  
Wall Mount Bracket



GBR-CM01  
Corner Mount Adapter

## ACCESSORIES

---



GBR-PM01  
Pole Mount Adapter

---



GBR-CE01  
Pendant Mount Bracket

---



GBR-AM02  
Adapter Ring for Pelco Pendant Mount  
with 1,5" NPT thread

---



GAC-B0202B  
Smoked Dome Cover for GCA-C0335P,  
GCI-C0735P

---