

# SC-MA1VDA

AHD, TVI, CVI, SD/CVBS  
Multi-format Video Distributor


## Eigenschappen

- 1 input / 4 output video signal distributor
- Various signal inputs and outputs (AHD, TVI, CVI, SD/CVBS)
  - AHD, TVI, CVI up to 8MP supported
- UTC function for HD analog signal (up to 8 MP)
- Video signal output with the same resolution as the input signal
- Video signal output without signal loss
- Built-in surge protection circuit

SC-MA1VDA is a video signal distributor that supports various input and output signals such as AHD, TVI, CVI, SD / CVBS. This product supports the UTC function for camera PTZ and OSD settings from a remote location through a coaxial cable. It is therefore cost-effective because no separate control lines are required.




[ SC-MA1VDA ]

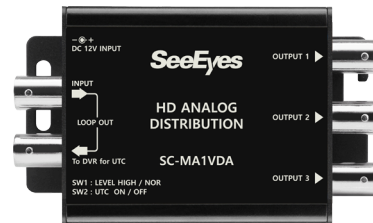

## UTC ondersteunende resoluties

Signal	Resolution
AHD	1280x720p 25/30Hz, 1920x1080p 25/30Hz, 2560x1440p 15/25/30Hz, 2592x1944p 12/20Hz, 3840x2160p 15
TVI	1280x720p 25/30Hz, 1920x1080p 25/30Hz, 2560x1440p 15/25/30Hz, 2592x1944p 12/20Hz, 3840x2160p 12.5/15
CVI	1280x720p 25/30Hz, 1920x1080p 25/30Hz, 2560x1440p 25/30Hz, 3840x2160p 12.5/15


## Toepassing (schema)

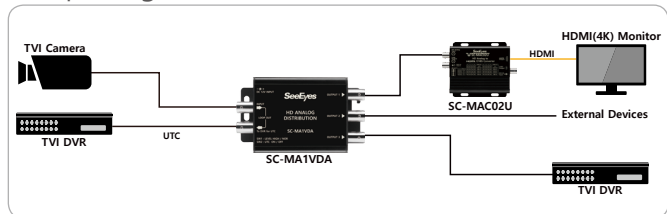

## Specificaties

MODEL	SC-MA1VDA	
Video Input	AHD/TVI/CVI(up to 8MP), SD/CVBS	
Video Output	Same resolution with Input signal	
Power Input	DC 12V / 0.5A	
Connection port	Video In	BNC-F, 1 IN
	Video Out	BNC-F, 4 OUT
	Power In	DC JACK
LED	Power In	
Power consumption	0.5W	
Temperature / Humidity	-10°C ~ +50°C / 0 ~ 80%	
Case / Weight	Aluminum / 121g	
Dimensions (mm)	106(W) x 60(H) x 25(D)	

## Afmetingen

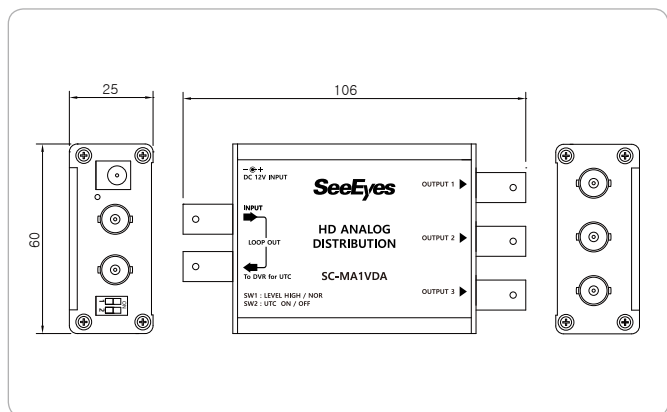

Wijzigingen voorbehouden!