

The compact size of active UTP Transmission system is composed of SC-UT0115C transmitter and SC-UR0115C&CP receiver. As SC-UT0115C and SC-UR0115C/CP located between camera and DVR, it is possible to transmit video such a long distance(Max.1.5Km) without degradation.


Features

- Active type of UTP transmission with excellent for Interference immunity
- Video transmission up to Max 1.5Km(Color) with high mode
- Distance level switch (Low : under 600m, High : 600~1.5Km)
- Low power consumption 25mA & parallel connection for power adaptor
- Easy to install at the Camera
- RED LED (working).
- Terminal Block connector for easy installation
- Non polarity

Specifications

MODEL	SC-UT0115C(Tx.)	
Video In	CVBS 1.0Vp-p, 75Ω	
Video Out	51Ω, 1Vp-p~2.5Vp-p	
power consumption	Under 25mA	
Power Input	DC power for camera(AC 24V,DC 12V)	
Bandwith	1.5km : 6MHz	
Max. distance (CAT 5)	Low : 600m, High : 600~1.5km	
Connect Port	Video In	BNC-M
	Video Out	4P Terminal Block(1,2 : VIDEO / 3,4 : POWER)
Temperature / Humidity	-10℃ ~ +50℃ / 0 ~ 80%	
Casebody / Weight	ABS / 20g	
Dimension(mm)	56(W) x 17(H) x 17(D)	

Dimensions

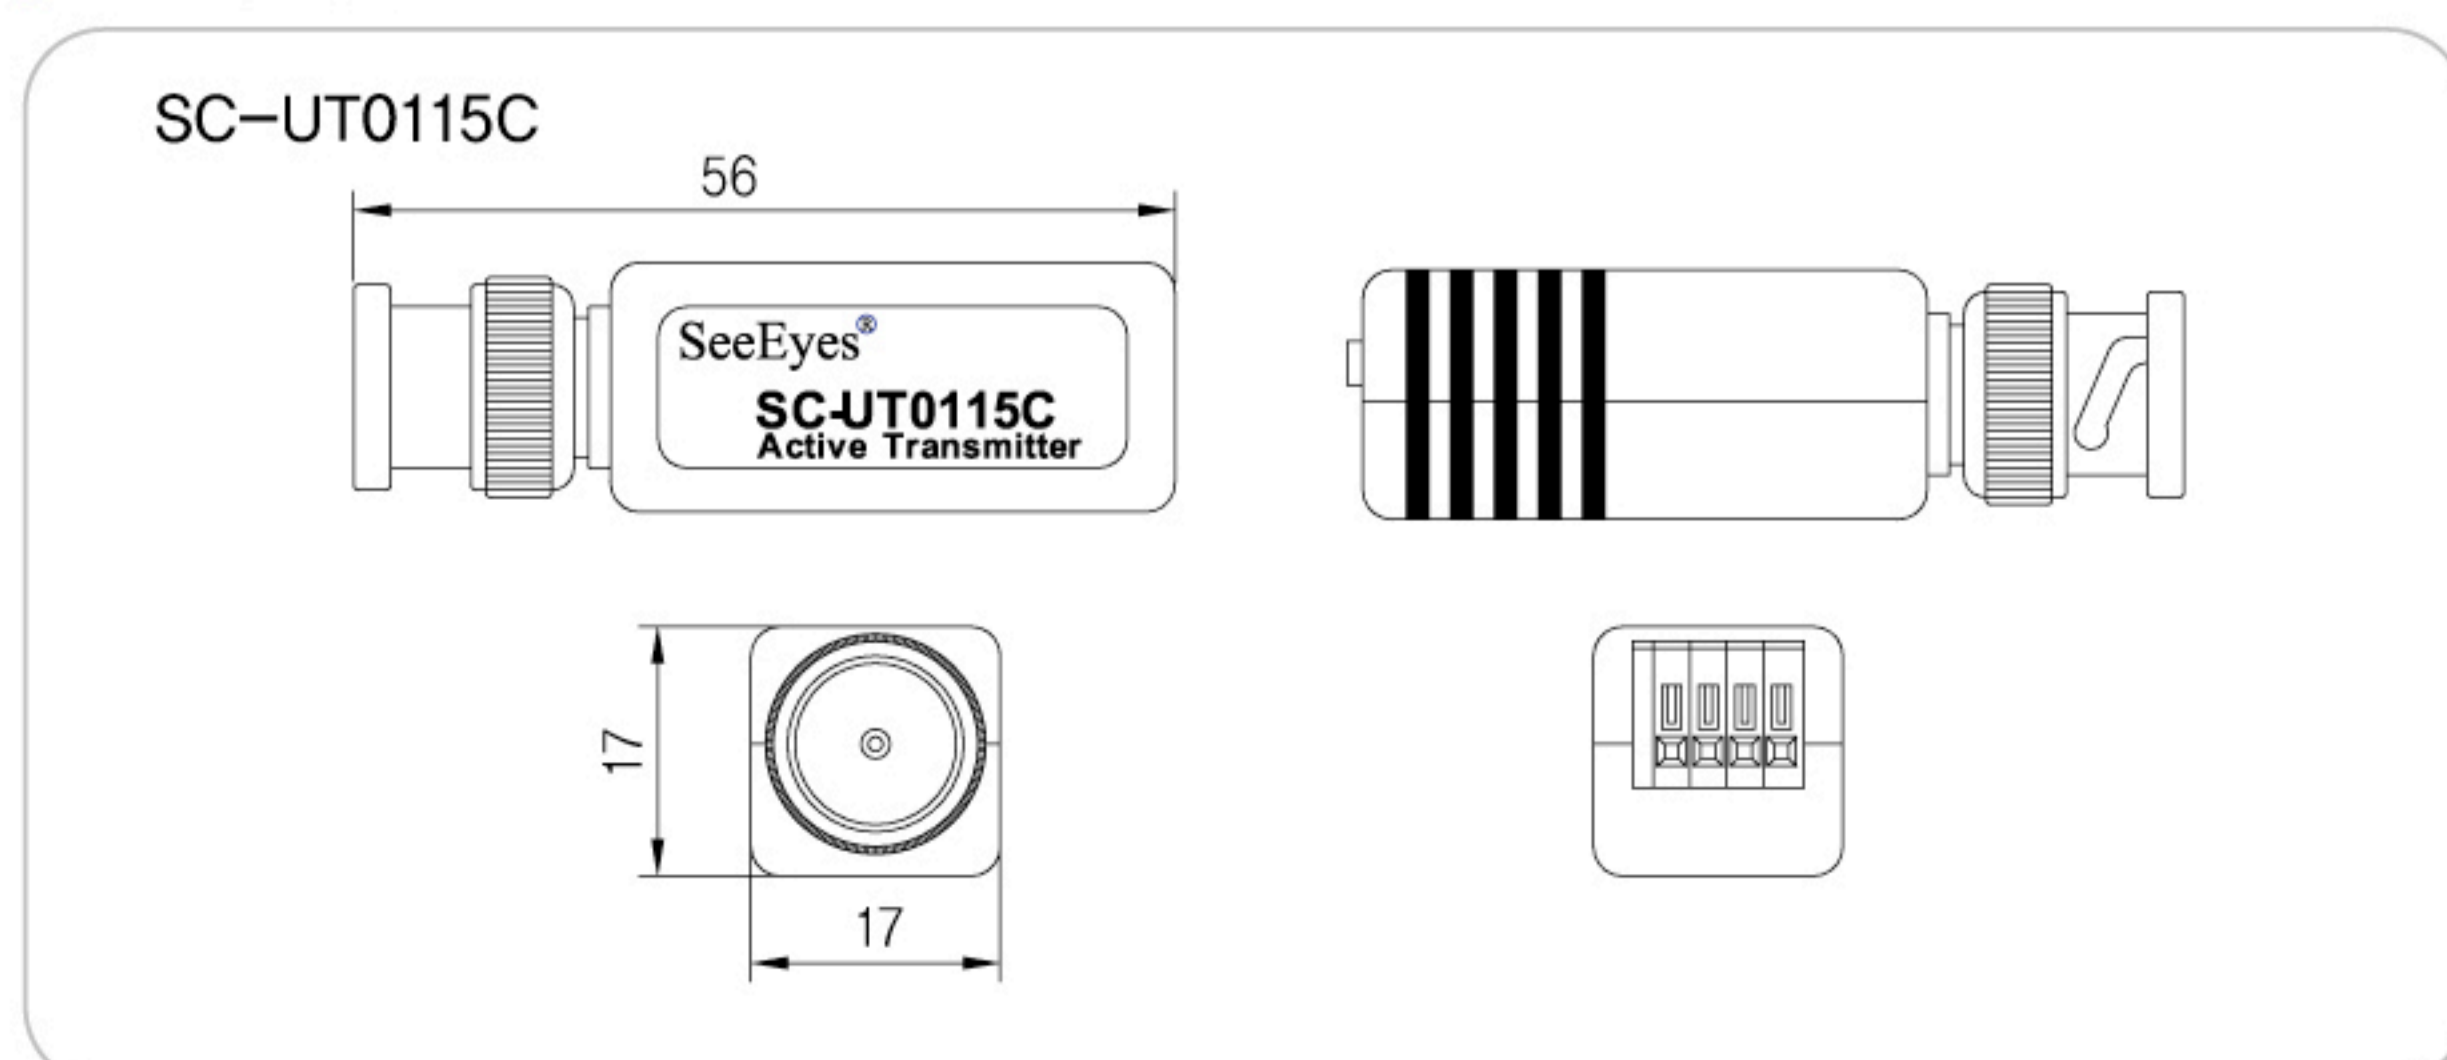

[SC-UT0115C]



Connection Diagram

