

### Features

- Active type of UTP transmission with excellent for Interference immunity
- Video transmission up to Max 1.5Km(Color) with high mode
- Distance level switch (Low : under 600m, High : 600~1.5Km)
- Low power consumption 25mA & parallel connection for power adaptor
- Easy to install at DVR rear directly (Compact Type)
- RED LED (working).
- Terminal Block connector for easy installation
- Non polarity

### Specifications

MODEL	SC-UR0115C(Rx.)	
Video In	51Ω, 1Vp-p ~ 2.5Vp-p,	
Video Out	CVBS 1.0Vp-p, 75Ω Term.	
power consumption	Under 25mA	
Power Input	Power adaptor (DC 12V 500mA/AC 24V 300mA)	
Bandwith	1.5km : 6MHz	
Max. distance (CAT 5)	Low : under 600m, High : 600~ 1.5Km	
Video Level Control	VR (A.Level/ F.Level), H/L Select	
Connect Port	Video In	BNC-M
	Video Out	4P Terminal Block(pin 1,2 : Video / pin 3,4 : Power)
Temperature / Humidity	-10°C ~ +50°C / 0 ~ 80%	
Casebody / Weight	ABS / 20g	
Dimension(mm)	56(W) x 17(H) x 17(D)	

MODEL	SC-UR0115C(Rx.)	
Video In	51Ω, 1Vp-p ~ 2.5Vp-p,	
Video Out	CVBS 1.0Vp-p, 75Ω Term.	
power consumption	Under 25mA	
Power Input	Power adaptor (DC 12V 500mA/AC 24V 300mA)	
Bandwith	1.5km : 6MHz	
Max. distance (CAT 5)	Low: under 600m, High: 600~ 1.5Km	
Video Level Control	VR (A.Level/ F.Level), H/L Select	
Connect Port	Video In	4P Harness(1,2: VIDEO / 3,4: POWER)
	Video Out	BNC-M
Temperature / Humidity	-10°C ~ +50°C / 0 ~ 80%	
Casebody / Weight	ABS / 25g	
Dimension(mm)	56(W) x 17(H) x 17(D)	

### [ SC-UR0115C ]




### [ SC-UR0115CP ]



### Dimensions

SC-UR0115C

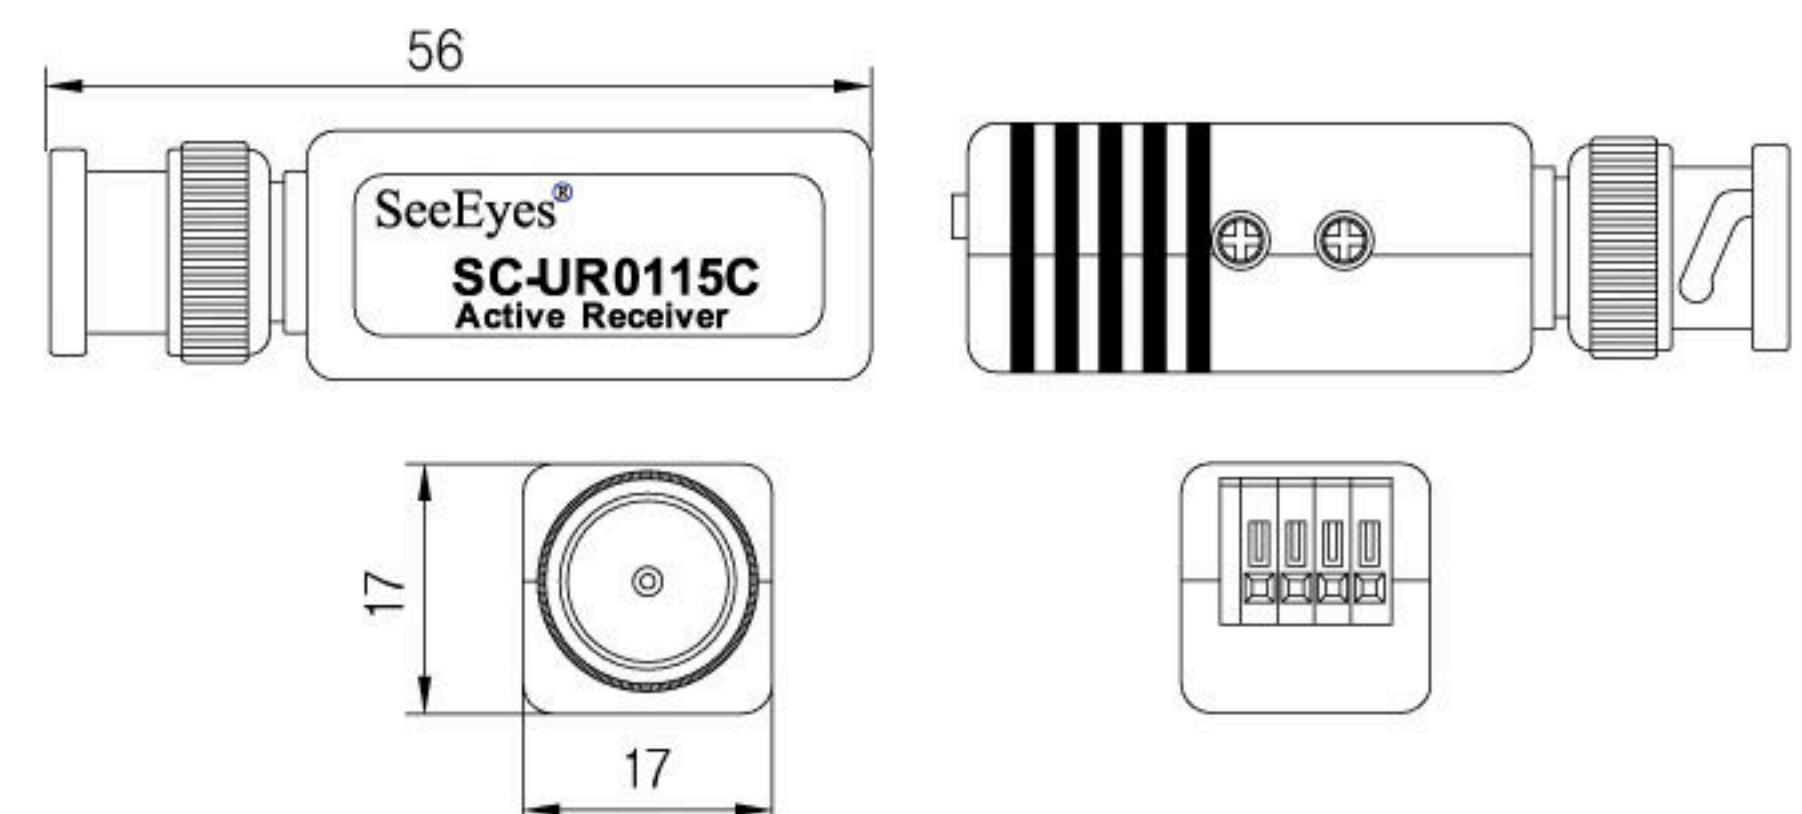

SC-UR0115CP

