

SC-NRC01MA


AHD(4M)/ TVI(2M)
HD-Analog Video Denoiser

Eigenschappen:


- Powerful denoising and intrusion prevention features
- Remote video signal transmission via the RG-59 coaxial cable
- Up to 700 m (based on AHD 2M/4M, TVI 2M)
- Supporting AHD 2M/4M, TVI 2M, Analog resolution
- Small aluminum case transmitter that can be mounted in the camera housing
- The camera adapter (DC 12V) can be used for both the transmitter and the camera
- Integrated harness cable for easy installation
- Built-in surge protection circuit



[SC-NRT01MA]



[SC-NRR01MA]




HD ANALOG TRANSMISSIE


Specificaties:

MODEL		SC-NRT01MA (1-channel transmitter)
Input signal		AHD 2M/4M, TVI 2M
Power	Power input	DC12V(Using the camera adapter)
Transmission distance(RG-59)		700m (AHD 2M/4M, TVI 2M)
Operation indicator(Red LED)		ON: Successful power input
Connection Port	Video input	BNC-M Harness
	RF output	BNC-F
Temperature / Humidity		-10°C ~ +50°C / 0 ~ 80%
Case Body / Weight		Aluminium / 70g
Dimensions(mm)		69.5(W) x 33(H) x 21.5(D)
MODEL		SC-NRR01MA (1-channel receiver)
Output signal		AHD 2M/4M, TVI 2M
Power	Power input	DC 12V 0.5A
Operation indicator(Red LED)		ON: Successful power input
Connection Port	RF input	BNC-F
	Video output	BNC-M Harness
Temperature / Humidity		-10°C ~ +50°C / 0 ~ 80%
Case Body / Weight		Aluminium / 120g
Dimensions(mm)		104(W) x 60(H) x 25(D)


SC-NRC01MA comparison before/after denoising

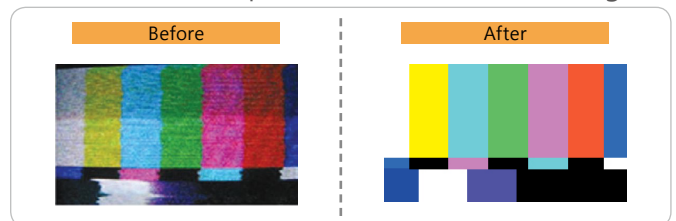

Toepassingen:

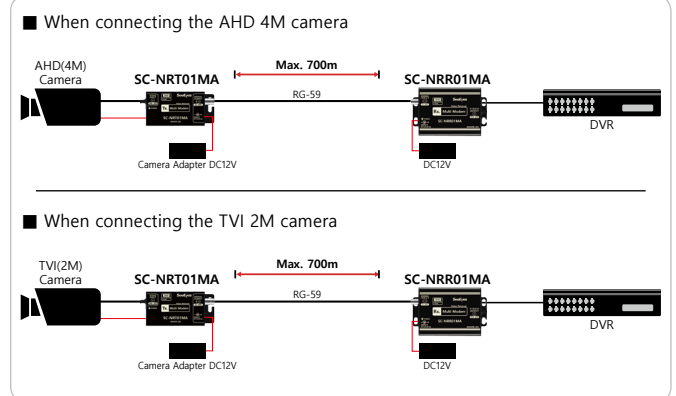

Afmetingen:

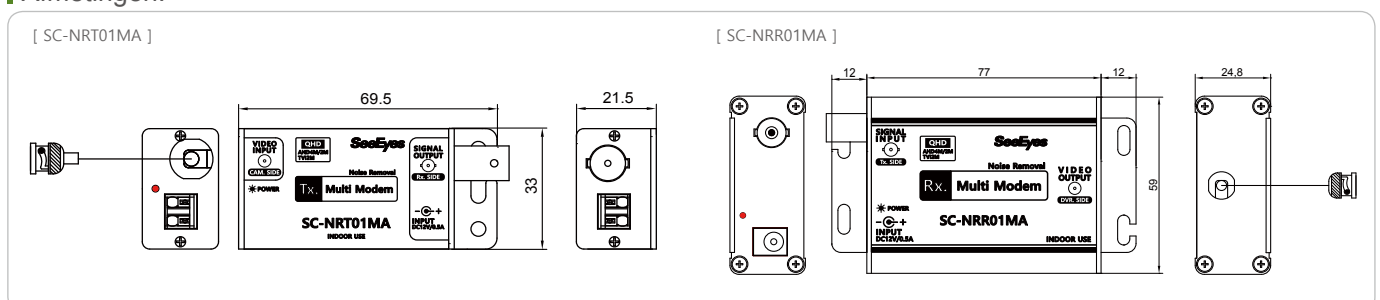

Wijzigingen voorbehouden!