

# GKB-A0110M

## Keyboard with 3D joystick



- Auto Protocol Search Function for easy installation
- Control DVR and PTZ separately
- Durable 3-axis PTZ joystick
- Camera, monitor, DVR and multiplexer selection

### SUMMARY

GKB-A0110M, system keyboard, is a controller that controls Cameras, DVR, Multiplexer and other devices by using RS-485 or RS-232 communication.


It is easy to operate with a user friendly on-screen menu and robust keys. The 3-axis joystick supports control of PTZ functions.

The RS485/232 ports support multiple camera protocols and can be individually adjusted in order to control different manufacturer devices on each port.

## SPECIFICATIONS

Serial Interface(s)	1x RS-232, 1x RS-485
Protocol	Grundig proprietary
Multi protocol (camera)	Pelco-D, Pelco-P, Panasonic, Samsung, DM, SonyD70, VCL, MIKAMI, CBC, B01, B02, SonyD70_R, EZ, VC, LILIN
Baud Rate	1,200 ~ 19,200bps
Control	Up to 99 DVRs
LCD Panel size	2x16 Gray Graphic LCD
Pan/Tilt Control	Pan (Left/Right), Tilt (Up/Down)
Lens Control	Iris (Close/Open), Focus (Near/Far), Zoom (Tele/Wide)
DVR Control	RW, Stop, Play, FF, Rec, PTZ, Menu, Search, Backup, Monitors
PTZ Control	Auto PAN, Preset, Sequence and Cruise Function Support
Humidity	20 ~ 70%RH
Storage Temperature	-40°C ~ +70°C
Operating Temperature	-10°C ~ +50°C
Supply Voltage	12 VDC power adaptor included
Power Consumption	1.5 W
Weight	2.5 kg
Dimensions w*h*d	299 x 94 x 188.5 mm

## DIMENSIONS

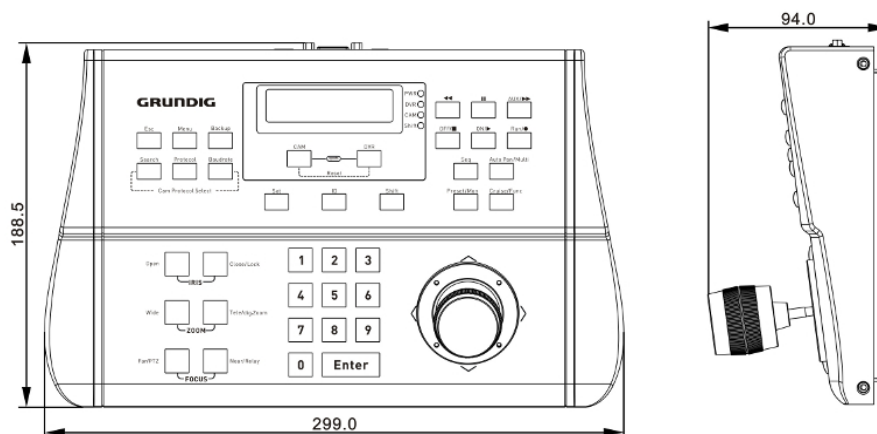

## FRONT & REAR VIEW

---

